

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/EP05/050002

International filing date: 03 January 2005 (03.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: EP  
Number: 04447003.7  
Filing date: 09 January 2004 (09.01.2004)

Date of receipt at the International Bureau: 15 March 2005 (15.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

11 JAN 2005

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

04447003.7

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr.:  
Application no.: 04447003.7  
Demande no:

Anmeldetag:  
Date of filing: 09.01.04  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Thomson Multimedia Broadband Belgium  
Prins Boudewijnlaan 47  
2650 Edegem  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Time synchronizing device and process and associated products

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04J3/06

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

The present invention relates to time synchronizing device and process and to corresponding products, including a local gateway.

Home gateways, which are used for home users to connect to  
5 external networks, mainly to the Internet, usually need time awareness. This  
allows e.g. Internet services for some users only at certain points in time or  
to include the time in event logging. As home gateways are consumer home-  
network appliances, everything is done to keep their price as low as  
possible, so as to reach the largest audience. However, this causes those  
10 devices to suffer from lack of liable embedded real time clock, and so makes  
them depend on an external device in the external network.

Typically, known home gateways thus use the widespread NTP  
protocol (for "Network Time Protocol"), or its adaptation to Internet, SNTP  
15 ("Simple NTP"), so as to synchronize the clocks of gateways over a network.  
Those protocols include retrieving time information from that network. More  
specifically, clients can get time from a centralized server, being a  
timeserver.

20 Such a timeserver is generally expensive, because it needs to  
connect to an accurate reference clock and is intended to support thousands  
of clients. Some timeservers are in fact publicly available on the Internet, but  
depending on such a public server involves a risk regarding reliable services.  
Namely, timeservers could be compromised by hackers impersonating them,  
25 and being thereby able to remotely influence home gateway behavior.

Moreover, getting time requires full connectivity of the gateways to  
that timeserver. Therefore, when connectivity to the latter is interrupted (for  
instance in case of DSL line down – for "Digital Subscriber Line", or  
30 unavailability of an NTP timeserver), some home network applications may  
no longer work as expected. Also, when one central timeserver on the

-2-

Internet (used by all home gateways of a single vendor) is down or unreachable, the home gateway functionalities are affected, which may notably disallow access to the Internet.

5 Further, time given by the timeserver is an absolute time, which does not take time zones into account. This is all the more complicated in view of daylight saving time, since the gap between the provided time and the local correct time depends on the periods of the year. A solution to that problem consists in storing at the timeserver, time information on the various  
10 devices liable to be synchronized with it. This however implies relatively heavy dynamic management and compels appropriate storing at the timeserver side. Another solution relies on systematically adapting the time received at the home gateways from the timeserver, based on data stored at the gateways. This however involves additional management and storing in  
15 the gateways, and thus increases the cost of the latter.

The invention concerns a time synchronizing device that may be able to provide precise time to gateways, notably to home gateways, while remedying the risks of connection loss with respect to network timeservers or  
20 failure thereof, and being economic compared to the integrated presence of accurate clocks in the gateways. The synchronizing device according to the invention may also be liable to provide time adapted to local time specificities, without requiring complex storing at a timeserver side or tedious management at the gateway side. Also, the synchronizing device of the  
25 invention could be at the same time economic, compared to the costs for controlling a precise timeserver, and safe compared to the dependency on publicly available timeservers.

The invention applies more generally to routers, which may be in  
30 particular gateways or modems.

-3-

The invention also concerns a time synchronizing process and a computer program liable to offer the advantages mentioned above, as well as a local gateway comprising a time synchronizing device compliant with the invention.

5

To this end, the invention relates to a time synchronizing device for synchronizing a router arranged between two communication networks. That synchronizing device comprises:

- 10 - receiving means for receiving synchronizing data based on a reference time clock,
- and exploiting means for exploiting those synchronizing data so as to synchronize a local time clock used by that router with respect to the reference time clock.

15 According to the invention, the time synchronizing device comprises:

- intercepting means for intercepting at least one message coming from at least one apparatus being a point of at least one of those networks, called the source network for that message, and directed to the other of those networks, called the target network for that message, that apparatus having a specific time clock,
- 20 - preparing means for preparing a time request intended for that apparatus, the time request being able to be executed in that apparatus so as to cause the synchronizing data based on that specific time clock to be obtained from that apparatus and to be transmitted back to the synchronizing device,
- 25 - sending means for sending the time request to that apparatus,
- and forwarding means for forwarding the intercepted message to the target network after the preparing means have prepared the time request.
- 30

-4-

Further, the receiving means are intended to receive the synchronizing data from that apparatus and the exploiting means are able to exploit the synchronizing data so as to synchronize the local time clock with respect to that specific time clock. The receiving means, exploiting means, 5 intercepting means, preparing means, sending means and forwarding means form an operational set.

Thus, surprisingly and in contrast with what is usually done, the required time is not obtained from a central timeserver over a network, 10 according to a given protocol such as NTP, but can be obtained from one or several local apparatus, advantageously from personal computers ("PCs"). This relies on the special features of the time synchronizing device of the invention, which include notably the ability to intercept messages from a network to another, and to send back an appropriate time request 15 accordingly.

Thereby, synchronization may be done even when a timeserver is not available, and may increase safety by reducing the dependence on external time sources. Also, it may make optional the knowledge of time 20 zone and daylight saving time indication regarding a local network, since that information is already taken into account in the received time (the "time" meaning date and/or hour). Those local data may anyway be obtained without difficulty by the time synchronizing device in preferred embodiments of the invention, directly from the involved apparatus in a given local network. 25 Further, the synchronizing device of the invention does not require the additional router cost of an embedded good precision hardware real-time clock. A supplementary asset thereof is that it may enable to reduce network load on the Internet, by not contacting timeservers (or by at least reducing the number of communications), while instead learning the time locally.

30

-5-

This is particularly interesting when the router is a local gateway and the apparatus are PCs. In a preferred embodiment, the source network is then a local area network ("LAN") and the target network is an external network, such as notably the Internet or other wide area network ("WAN"), for all intercepted messages.

As a matter of fact, time on home user computers can be considered as quite accurate. For example, a home gateway being the way to reach the external world, the home computer information provides partially or completely the time configuration. The time request may then have the form of a small program returned or inserted by the home gateway when a user requests information from the external network, preferably via the HTTP protocol (for "HyperText Transfer Protocol"). Namely and as an illustration, the user addressing an HTTP server and expecting a response, such a small program is inserted as a script in a temporary page. It is then executed in the user Web browser of a PC, and makes sure the home user computer time is present in following requests for information. The home gateway monitors afterwards the reply sent from the PC to learn the computer time.

The time synchronizing device may be integrated in the router, or be in the form of an external device connected to the router. In the latter case, the synchronizing device may be coupled to several routers, notably when the latter belong to a same local network. Further, the synchronizing device may be implemented entirely as software, for example in the C language, or at least partly as hardware.

In a particular embodiment, one of the networks has a single apparatus, consisting for example in a home network with only one PC, connected to the Internet via a modem. In a still more specific form, each of both networks has only one apparatus.



-6-

The time synchronizing device of the invention may make useless any resort to a precise timeserver clock. Anyway, it could alternatively be considered as a tool complementary to the timeserver contribution, notably to the NTP mechanism. In the latter case, the router synchronization may be usually based on the timeserver data. However, in case of any connection failure between the router and the timeserver, the synchronizing device is available for getting accurate time. In another application, advantageously combined with the former one, the timeserver is commonly used but gives an hour not adapted to local specificities. Then, the synchronizing device provides the required adaptation data, such as time zone and/or daylight saving time information.

The receiving means should be interpreted as not necessarily being only intended for passive reception, but possibly also including functions of extraction of useful data (typically in relation to the format of the received data).

Preferably:

- the intercepting means are intended to intercept the message and the receiving means are intended to receive and extract the synchronizing data in compliance with the HTTP protocol;
- and/or the preparing means are intended to prepare the time requests in the form of executable scripts, preferably based on the Java language; more specifically, those scripts are advantageously in the JavaScript language.

The HTTP protocol and Java scripts are particularly appropriate and convenient for the time synchronizing device according to the invention, since HTTP provides direct interaction between the gateway and the apparatus, and enables the gateway to retrieve time data from the apparatus by means of Java scripts. Also, messages received from the apparatus to

-7-

the gateway in compliance with the HTTP protocol usually arrive on a given known reception port. Thus, HTTP combines the potentialities of message interception and of sending back time requests.

5           Otherwise, any communication protocol liable to be used for connecting apparatus to a network, to be understood by a router and to enable the insertion of instructions that can be executed by the apparatus for sending back information, could also be suitable. Preferably then, the protocol allows inserting the instructions transparently to the users of the  
10   apparatus.

          The forwarding means are preferably intended to forward the intercepted message to the target network only after the exploiting means have exploited the synchronizing data obtained from the apparatus by  
15   means of the time request. In another embodiment, the forwarding means are intended to forward the intercepted message as soon as the time request has been prepared.

          The preparing means are advantageously able to prepare the time  
20   request for getting at least one of the following synchronizing data: time zone and daylight saving time information. The time zone and/or daylight saving time information may be used later by the synchronizing device, notably in case a synchronization time is received from a timeserver (e.g. in the NTP frame). The preparing means may also prepare the time request for further  
25   directly getting the hour from the apparatus, based on its specific time clock.

          Advantageously, the time synchronizing device comprises updating means for periodically updating the synchronizing data so as to synchronize the local time clock, by periodically activating the operational  
30   set. Those updating means are preferably intended for using as the

-8-

intercepted message for each of the updating periods, the first message received from at least one of the communication networks during that period.

This enables to take into account drifts in the local time clock. Additional activating of the updating means could be done in case of router  
5 reinitializing, since then, time in the router usually restarts from zero.

Also, the synchronizing device preferably comprises safety means able to activate the operational set for at least two successive messages from respectively at least two different apparatus, to compare the  
10 synchronizing data respectively obtained for the successive messages, to check consistency of the synchronizing data and to trigger a warning mechanism in case of inconsistency.

Several solutions may be put in practice for that warning mechanism, like advising all the concerned users, or only the lastly contacted  
15 one. In case of such an inconsistency, the time synchronizing device is advantageously able to obtain the synchronizing data from at least three apparatus, and to check if a majority of them is consistent. Then, it may be considered that only one or a few apparatus among them have a higher probability of time failure, and be warned consequently. Alternatively, the  
20 synchronizing device could get a correct hour from a timeserver. Then, it could thereby identify the falling specific clock(s) and contact only the corresponding apparatus.

Of course, the diagnosis of inconsistency should take into account the relative places of the apparatus. For example, in a LAN, all apparatus  
25 thereof should probably have the same time zone and daylight saving time.

The nature of inconsistency to be tested is preferably defined at the synchronizing device. It could consist for example in a difference between two specific clock times of a given LAN that is above a predetermined threshold value. It could also consist in non-agreement  
30 between the time zones and/or the daylight saving times in apparatus of a same given LAN.

-9-

More generally, conflict management algorithms could be implemented.

Also, in case of small discrepancies between specific clock times,  
5 below a conflict management threshold, it may be advantageous that the synchronizing device averages the obtained times so as to determine an accurate time to be used.

Anyway, it could be interesting for applying the invention that  
10 some regular checking is done of the apparatus liable to give time data to the synchronizing device, for making sure that the time therein is set correctly. This is particularly convenient for a home network.

The invention also applies to a local gateway (which may be  
15 notably a modem or an HTTP proxy) intended to be arranged between a LAN and a WAN and to enable communication in both directions between the LAN and the WAN. The local gateway comprises:

- a LAN interface for communication with the LAN,
- a WAN interface for communication with the WAN,
- 20 - a local gateway time clock,
- and synchronizing means for synchronizing the local gateway time clock with respect to a reference time clock, by means of synchronizing data received by the local gateway.

25 According to the invention, the synchronizing means comprise a time synchronizing device compliant with any of the embodiments of the invention for synchronizing the local gateway, the source and target networks being respectively the LAN and the WAN for all intercepted messages, and the apparatus used for synchronizing being thus at least one  
30 point of the LAN.

-10-

Preferably, the synchronizing means are also able to synchronize the local gateway time clock with respect to a global time clock available from a timeserver of the WAN.

- 5           The invention further relates to a process for time synchronizing a router arranged between two communication networks. The time synchronizing process comprises the following steps:
- receiving synchronizing data based on a reference time clock,
  - and exploiting those synchronizing data so as to synchronize a
- 10   local time clock used by the router with respect to the reference time clock.

According to the invention, the time synchronizing process also comprises the following steps:

- intercepting at least one message coming from at least one
- 15   apparatus being a point of at least one of the networks, called the source network for that message, and directed to the other of the networks, called the target network for that message, that apparatus having a specific time clock,
- preparing a time request intended for that apparatus, that time
- 20   request being able to be executed in that apparatus so as to cause the synchronizing data based on that specific time clock to be obtained back from the apparatus,
- sending the time request to that apparatus,
  - and forwarding the intercepted message to the target network
- 25   after the time request has been prepared.

- The receiving step further includes receiving the synchronizing data from that apparatus and the exploiting step includes exploiting the synchronizing data so as to synchronize the local time clock with respect to
- 30   that specific time clock.

-11-

The time synchronizing process is preferably intended to be executed by means of a time synchronizing device compliant with any embodiment of the invention.

5           The invention also concerns a computer program product comprising program code instructions for the execution of the process according to the invention when that program is executed on a computer. By "computer program product", it is meant a support for computer program, which can consist not only in a storing space containing that program, such  
10 as a diskette or a cassette, but also in a signal, such as an electrical or optical signal.

The invention will be better understood and illustrated by means of the following embodiment and execution examples, in no way limitative,  
15 with reference to the appended figures on which:

- Figure 1 shows a local area network connected to a wide area network via a gateway that includes a time synchronizing device compliant with the invention;
- 20           - Figure 2 is a block diagram detailing the synchronizing device of Figure 1;
- and Figure 3 illustrates the main steps of the synchronizing process executed by means of the synchronizing device of Figures 1 and 2.

25           In Figure 2, the represented blocks are purely functional entities, which do not necessarily correspond to physical separated entities. Namely, they could be developed in the form of software, or be implemented in one or several integrated circuits.

30           A gateway 10 (Figure 1) is arranged between a Local Area Network (LAN) 4 and a Wide Area Network (WAN) 5, and provides

-12-

communications between both networks 4 and 5 via network interfaces 2 and 3, respectively. The gateway 10 comprises a coarse clock CL0 and a time synchronizing device 1, able to synchronize the clock CL0 with respect to at least one more accurate remote clock.

5

The LAN 4 is provided with a plurality of apparatus A1, A2... An, including respectively specific internal clocks CL1, CL2... CLn. The WAN 5 is notably coupled with a data server 7, able to send information to the apparatus Ai of the LAN 4 under request, and with a timeserver 8, including  
10 a precise global clock GCL. The timeserver 8 is intended to give synchronization data to any device connected to the WAN 5.

The synchronization device 1 will be detailed below through its various functions. It comprises (Figure 2) an operation set 20 including:

- 15           - a receiving unit 11 intended to receive reference synchronization data SYNC, and to extract them from a formatted message, if necessary,
- an exploiting unit 12 able to exploit the synchronization data SYNC so as to synchronize the coarse clock CL0,
- 20           - an intercepting unit 13 provided for intercepting a message MSG coming from any of the apparatus Ai of the LAN 4 and directed to the WAN 5, for example addressed to the data server 7,
- a preparing unit 14, able to prepare a time request RQ based on the message MSG and intended for the apparatus Ai from which the  
25 message MSG is originating; the time request RQ targets time data to be used by the synchronizing device 1 for synchronizing the coarse clock CL0;
- a sending unit 15 intended to send the time request RQ to the concerned apparatus Ai;
- and a forwarding unit 16 able to forward the message MSG  
30 formerly intercepted by the intercepting unit 13.

-13-

The time synchronizing device 1 also comprises an updating unit 17, intended to periodically activate the operational set 20 for updating the synchronizing data and for thus synchronizing the local time clock CL0. As the event for triggering the synchronization is not controlled by the gateway 10, namely receiving a message from one of the apparatus Ai and directed to the WAN 5, this means that the updating unit 17 puts the operational set 20 in a "ready" state, able to execute the synchronizing process when a relevant message passes through the gateway 10. Preferably, that message MSG is the first one received by the latter as soon as a new synchronization period starts.

The updating unit 17 is also able to activate the operational set 20 in other particular circumstances, such as when an operator decides to, or when the gateway 10 is re-initialized.

In practice, the updating unit 17 may check if the operational set 20 must be activated each time a message MSG addressed to the WAN 5 is received from one of the apparatus Ai.

The time synchronizing device 1 further comprises a safety unit 18, able to activate the operational set 20 for at least two successive messages MSG coming from respectively at least two of the apparatus Ai, to compare the synchronizing data SYNC respectively obtained for those successive messages, to check their consistency, and to trigger a warning mechanism in case of inconsistency.

In a specific example, the apparatus Ai are home computers provided with Internet browser applications that are JavaScript enabled, the LAN 4 being a home network and the WAN 5 being the Internet. The protocol HTTP is further used. Then, the preparing unit 14 is intended to prepare the time request RQ in the form of a JavaScript script, which automatically executes when received by the involved home computer, as HTTP response.



-14-

When operated, the synchronizing device 1 leads to the following development (Figure 3):

- after startup, the home gateway 10 gets absolute time from the timeserver 8 (if the latter is available) (step S1);
- a home user of one of the apparatus Ai tries to access the WAN 5 to get some information (step S2); typically, the home user opens a Web-page when using the browser to get information from the Internet using HTTP, and an HTTP request is sent to the Internet data server 7;
- the gateway 10 sees the request for information, in the form of a message MSG (step S3), by intercepting the HTTP request; if time information related to the local clock CL0 is not yet complete or is considered as obsolete, the home gateway 10 does not forward immediately the message MSG to the external network 5; if on the contrary, time information is complete and considered as valid, the following steps S4 to S6 are not executed, and step S7 is immediately applied;
- the home gateway 10 returns to the home computer (apparatus Ai) the order to give its time information (time request RQ) (step S4); the order is in the form of a JavaScript script as a response to the HTTP request;
- the home computer returns its time information (synchronization data SYNC) after the execution of the script (step S5); in the present example, the script posts the time information from the client to the gateway 10 via a new HTTP request;
- the gateway 10 reconfigures itself using the time information provided by the home computer (step S6);
- the gateway 10 forwards the Information request (message MSG) to the external network 5 (step S7); here, it relays the original browser HTTP request to the correct Internet data server 7;
- the external network 5 returns the requested information – here, HTTP information (step S8);

-15-

- and when the gateway 10 receives the requested information, it forwards it down to the home computer (step S9).

-16-

**CLAIMS**

1. Time synchronizing device (1) for synchronizing a router (10)  
5 arranged between two communication networks (4, 5), said synchronizing device (1) comprising:
- receiving means (11) for receiving synchronizing data (SYNC) based on a reference time clock (CL1-CLn),
  - and exploiting means (12) for exploiting said synchronizing data  
10 (SYNC) so as to synchronize a local time clock (CL0) used by said router (10) with respect to said reference time clock (10),
- characterized in that said time synchronizing device (1) comprises:
- 15 - intercepting means (13) for intercepting at least one message (MSG) coming from at least one apparatus (A1-An) being a point of at least one of said networks (4), called the source network for said message (MSG), and directed to the other of said networks (5), called the target network for said message (MSG), said apparatus (A1-An) having a specific time clock  
20 (CL1-CLn),
  - preparing means (14) for preparing a time request (RQ) intended for said apparatus (A1-An), said time request being able to be executed in said apparatus so as to cause said synchronizing data (SYNC) based on said specific time clock (CL1-CLn) to be obtained from said  
25 apparatus (A1-An) and to be transmitted back to said synchronizing device (1),
  - sending means (15) for sending said time request (RQ) to said apparatus (A1-An),
  - and forwarding means (16) for forwarding said intercepted  
30 message (MSG) to said target network (5) after the preparing means (14) have prepared said time request (RQ),

-17-

said receiving means (11) being intended to receive said synchronizing data (SYNC) from said apparatus (A1-An) and said exploiting means (12) being able to exploit said synchronizing data (SYNC) so as to synchronize said local time clock (CL0) with respect to said specific time  
5 clock (CL1-CLn), said receiving means (11), exploiting means (12), intercepting means (13), preparing means (14), sending means (15) and forwarding means (16) forming an operational set (20).

2. Synchronizing device (1) according to claim 1, characterized in  
10 that said intercepting means (13) are intended to intercept said message (MSG) and said receiving means (11) are intended to receive and extract said synchronizing data (SYNC) in compliance with the HTTP protocol.

3. Synchronizing device (1) according to claims 1 or 2,  
15 characterized in that said preparing means (14) are intended to prepare the time requests (RQ) in the form of executable scripts, preferably based on the Java language.

4. Synchronizing device (1) according to any of claims 1 to 3,  
20 characterized in that said forwarding means (16) are intended to forward said intercepted message (MSG) to said target network (5) only after the exploiting means (12) have exploited said synchronizing data (SYNC) obtained from said apparatus (A1-An) by means of said time request (RQ).

25 5. Synchronizing device (1) according to any of the preceding claims, characterized in that said preparing means (14) are able to prepare said time request (RQ) for getting at least one of the following synchronizing data (SYNC): time zone and daylight saving time information.

30 6. Synchronizing device (1) according to any of the preceding claims, characterized in that it comprises updating means (17) for

-18-

periodically updating said synchronizing data (SYNC) so as to synchronize said local time clock (CLO), by periodically activating said operational set (20), said updating means (17) being preferably intended for using as said intercepted message (MSG) for each of said updating periods, the first  
5 message received from at least one of said communication networks (4, 5) during said period.

7. Synchronizing device (1) according to any of the preceding claims, characterized in that it comprises safety means (18) able to activate  
10 said operational set (20) for at least two successive messages (MSG) from respectively at least two different apparatus (A1-An), to compare said synchronizing data (SYNC) respectively obtained for said successive messages, to check consistency of said synchronizing data (SYNC) and to trigger a warning mechanism in case of inconsistency.

15

8. Local gateway (10) intended to be arranged between a LAN (4) and a WAN (5) and to enable communication in both directions between the LAN (4) and the WAN (5), said local gateway comprising:

- a LAN interface (2) for communication with the LAN (4),
- 20 - a WAN interface (3) for communication with the WAN (5),
- a local gateway time clock (CLO),
- and synchronizing means for synchronizing said local gateway time clock (CLO) with respect to a reference time clock (CL1-CLn), by means of synchronizing data (SYNC) received by said local gateway (10),

25

characterized in that said synchronizing means comprise a time synchronizing device (1) compliant with any of claims 1 to 7 for synchronizing said local gateway (10), said source and target networks being respectively the LAN (4) and the WAN (5) for all intercepted messages (MSG), and said  
30 apparatus (A1-An) used for synchronizing being thus at least one point of said LAN.

-19-

9. Local gateway (10) according to claim 8, characterized in that said synchronizing means are also able to synchronize said local gateway time clock (CL0) with respect to a global time clock (GCL) available from a timeserver (8) of the WAN (5).

10. Process for time synchronizing a router (10) arranged between two communication networks (4, 5), said time synchronizing process comprising the following steps:

- 10       - receiving (S5) synchronizing data (SYNC) based on a reference time clock (CL1-CLn),
- and exploiting (S6) said synchronizing data (SYNC) so as to synchronize a local time clock (CL0) used by said router (10) with respect to said reference time clock (10);

15

characterized in that said time synchronizing process also comprises the following steps:

- intercepting (S3) at least one message (MSG) coming from at least one apparatus (A1-An) being a point of at least one of said networks (4), called the source network for said message (MSG), and directed to the other of said networks (5), called the target network for said message (MSG), said apparatus (A1-An) having a specific time clock (CL1-CLn),
  - preparing a time request (RQ) intended for said apparatus (A1-An), said time request being able to be executed in said apparatus so as to cause said synchronizing data (SYNC) based on said specific time clock (CL1-CLn) to be obtained back from said apparatus (A1-An),
  - sending (S4) said time request (RQ) to said apparatus (A1-An),
  - and forwarding (S7) said intercepted message (MSG) to said target network (5) after said time request (RQ) has been prepared,
- 30       said receiving step (S2) including receiving said synchronizing data (SYNC) from said apparatus (A1-An) and said exploiting step (S6)

-20-

including exploiting said synchronizing data (SYNC) so as to synchronize said local time clock (CL0) with respect to said specific time clock (CL1-CLn),

5        said time synchronizing process being preferably intended to be  
executed by means of a time synchronizing device (1) compliant with any of  
claims 1 to 7.

11. Computer program product comprising program code  
instructions for the execution of the process according to claim 10 when said  
10    program is executed on a computer.

## ABSTRACT

### Time synchronizing device and process and associated products

5

The present invention concerns a time synchronizing device (1) and process, and a local gateway comprising that device.

The time synchronizing device synchronizes a router arranged  
10 between two communication networks. It comprises intercepting means (13) of a message (MSG) coming from an apparatus of a source network for that message, having a specific time clock, and directed to a target network for that message, preparing means (14) of a time request (RQ) able to be executed in that apparatus so as to cause synchronizing data (SYNC) based  
15 on that specific clock to be obtained from that apparatus and to be transmitted back to the synchronizing device, sending means (15) of the time request to the apparatus, forwarding means (16) of the intercepted message to the target network after the preparing means have prepared the time request, receiving means (11) of the synchronizing data, and exploiting  
20 means (12) of those data to synchronize a local time clock (CL0) used by the router with respect to that specific time clock .

Application to home networks.

25

FIG. 2



1/3

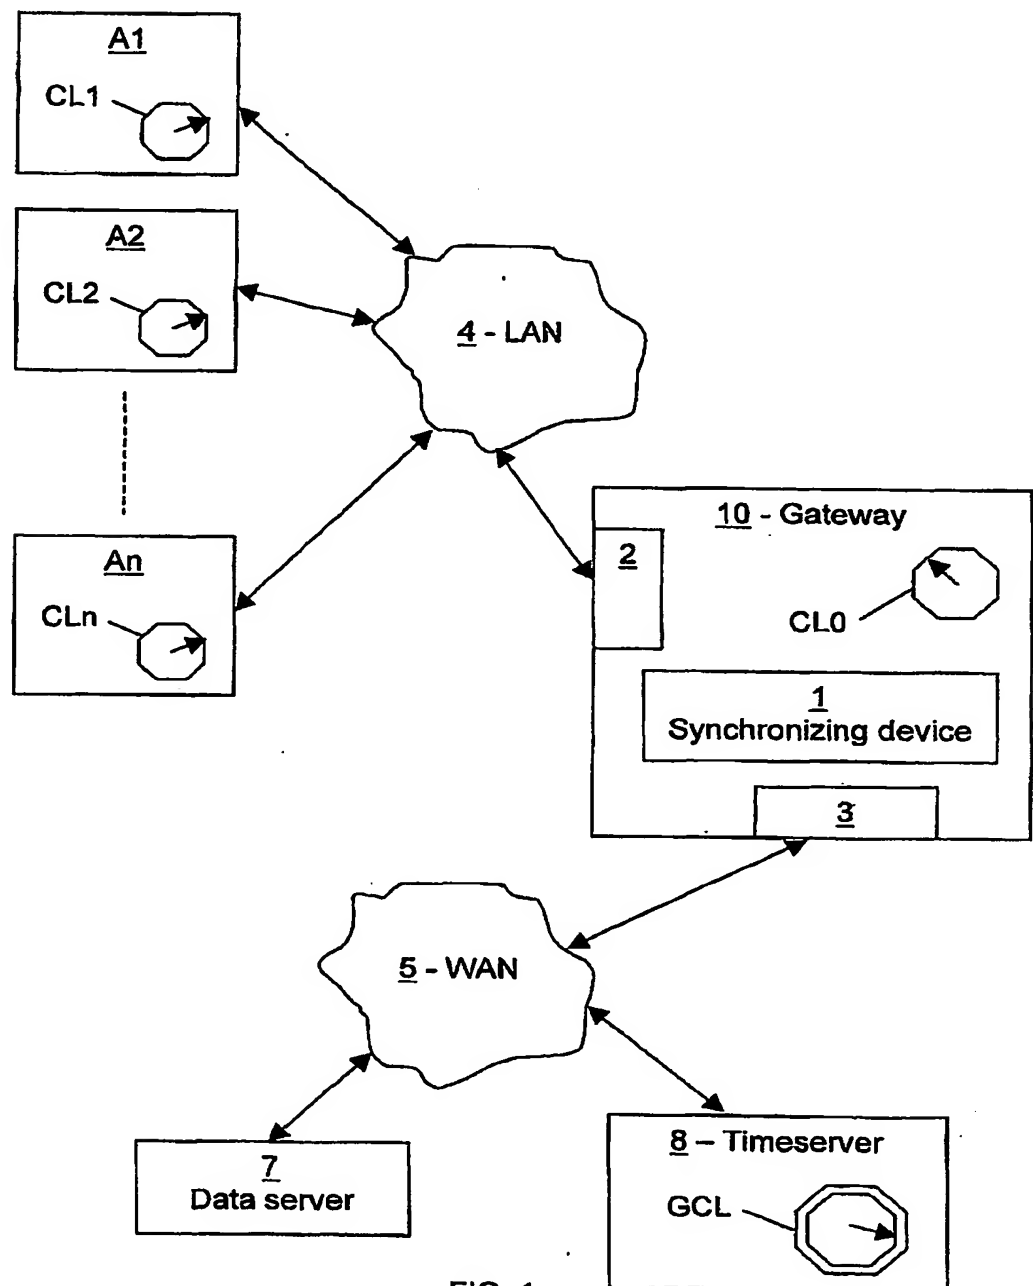


FIG. 1

2/3

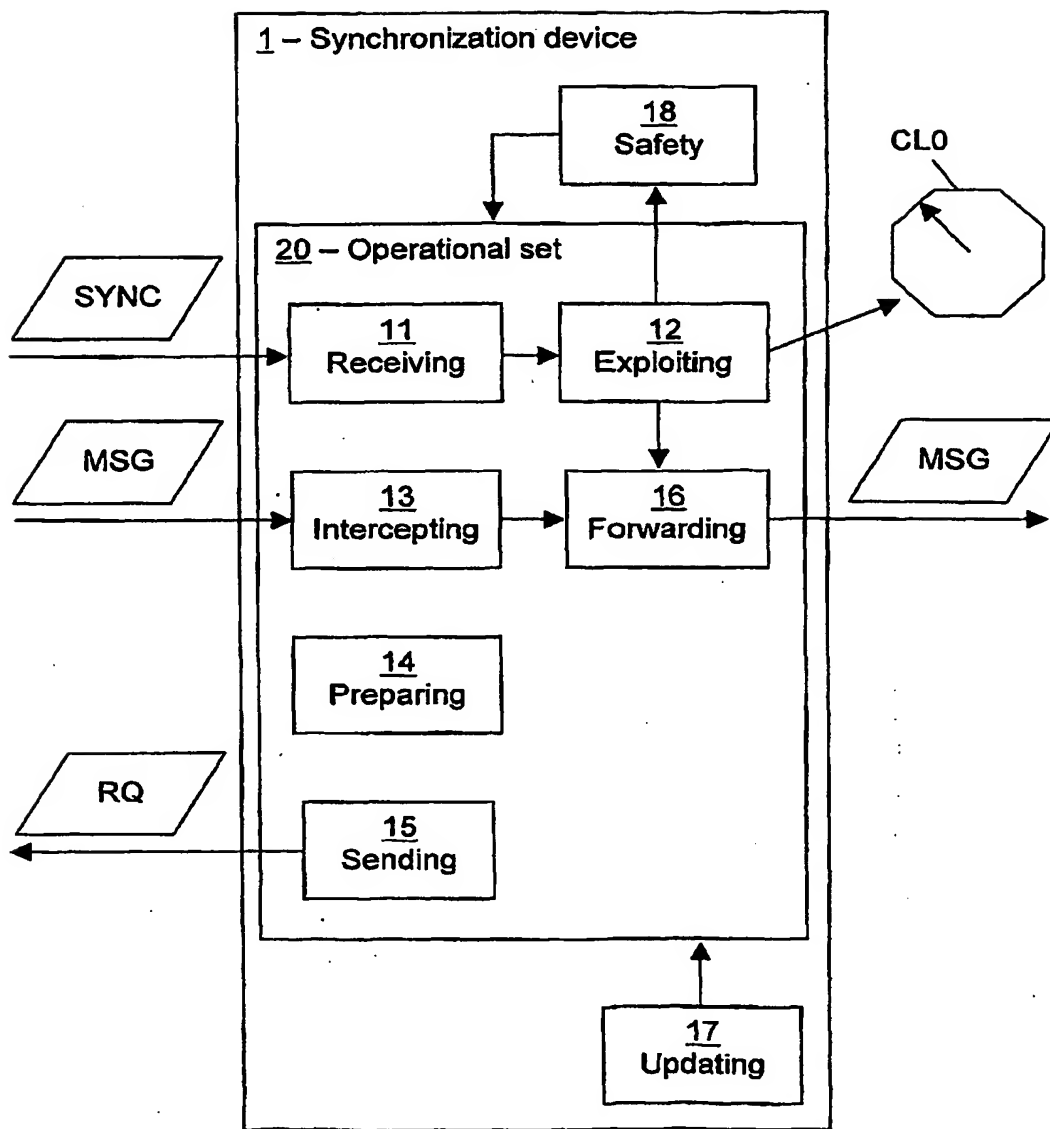


FIG. 2

3/3

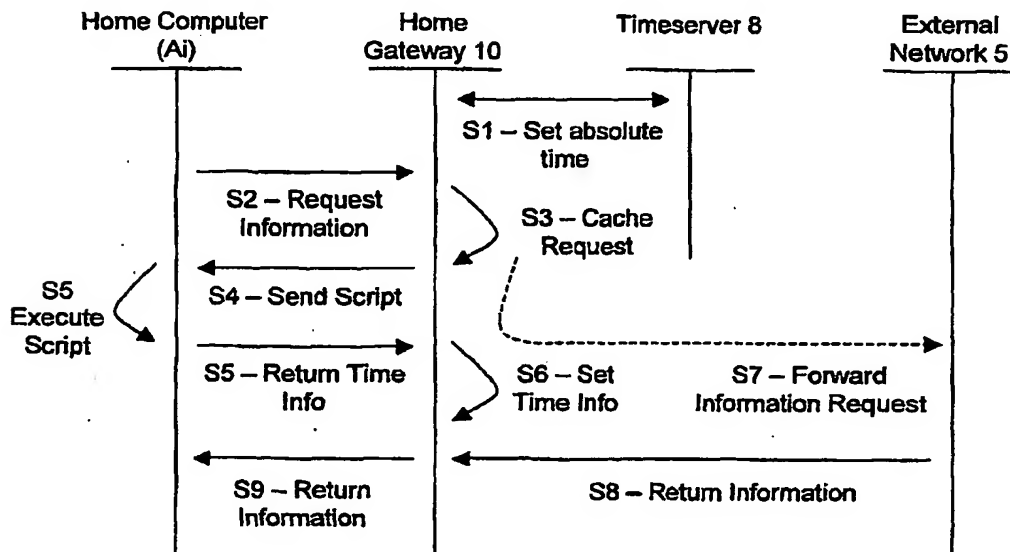


FIG. 3

From the INTERNATIONAL BUREAU

**PCT**NOTIFICATION CONCERNING  
SUBMISSION OR TRANSMITTAL  
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

To:

KERBER, Thierry  
Thomson  
46, quai Alphonse Le Gallo  
F-92648 Boulogne Cedex  
FRANCE

Date of mailing (day/month/year) 23 March 2005 (23.03.2005)	
Applicant's or agent's file reference PF040016	<b>IMPORTANT NOTIFICATION</b>
International application No. PCT/EP05/050002	International filing date (day/month/year) 03 January 2005 (03.01.2005)
International publication date (day/month/year)	Priority date (day/month/year) 09 January 2004 (09.01.2004)
Applicant THOMSON MULTIMEDIA BROADBAND BELGIUM et al	

- By means of this Form, which replaces any previously issued notification concerning submission or transmittal of priority documents, the applicant is hereby notified of the date of receipt by the International Bureau of the priority document(s) relating to all earlier application(s) whose priority is claimed. Unless otherwise indicated by the letters "NR", in the right-hand column or by an asterisk appearing next to a date of receipt, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- (If applicable)* The letters "NR" appearing in the right-hand column denote a priority document which, on the date of mailing of this Form, had not yet been received by the International Bureau under Rule 17.1(a) or (b). Where, under Rule 17.1(a), the priority document must be submitted by the applicant to the receiving Office or the International Bureau, but the applicant fails to submit the priority document within the applicable time limit under that Rule, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- (If applicable)* An asterisk (\*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b) (the priority document was received after the time limit prescribed in Rule 17.1(a) or the request to prepare and transmit the priority document was submitted to the receiving Office after the applicable time limit under Rule 17.1(b)). Even though the priority document was not furnished in compliance with Rule 17.1(a) or (b), the International Bureau will nevertheless transmit a copy of the document to the designated Offices, for their consideration. In case such a copy is not accepted by the designated Office as the priority document, Rule 17.1(c) provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
09 January 2004 (09.01.2004)	04447003.7	EP	15 March 2005 (15.03.2005)

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Authorized officer

Zoltanski Andrzej

Facsimile No. +41 22 740 14 35

Facsimile No. +41 22 338 89 75  
Telephone No. +41 22 338 8608